

## DESCRIPTION

VERTIFIX is latex based non-flammable white mastic adhesive for installing all types of ceramic tiles. VERTIFIX has excellent adhesion and workability. For interior installation of ceramic, slate, marble, stones, granite on walls and floors (light circulation area). For tub surrounds and shower walls when requirements do not exceed ANSI A136.1. Type 1.

## CHARACTERISTICS

- Easy to install on walls
- When installed, the paste will make a suction facilitating the installation on vertical area
- All in one adhesive already mixed
- Low VOC level - ecologic
- Faint odour

## FORMATS

- 946 ml bucket
- 3,79L bucket
- 13,5L bucket

## TECHNICAL DATA @ 22 C

Meets or exceeds standard norms:  
Type 1 ANSI A136.1

Pot life	2 hours
Open time	30-45 minutes
Initial set	24-48 hours
Final set	28 days
Colour	White
Coverage	
3/16 V shaped trowel	946ml cover 14 sq-ft
3/16 V shaped trowel	3.79L cover 50 sq-ft
3/16 V shaped trowel	13.5L cover 175 sq-ft

## TILE AND STONE INSTALLATION SYSTEMS

- Self-levelling
- Thinset mortar
- Adhesive
- Cement grout
- Water-based epoxy grout
- Waterproofing
- Acoustic adhesive
- Sealers
- Cleaners
- Strippers
- Colorants




Manufactured by La Margna Inc.  
412, avenue St-Sacrement  
Québec (Qc)  
G1N 3Y3

Tel: 418-688-8286, toll free 1-800-463-6850  
Fax: 418-688-2070, toll free 1-800-419-4819  
[www.profixsystems.com](http://www.profixsystems.com)



## How to use ceramic tile adhesive

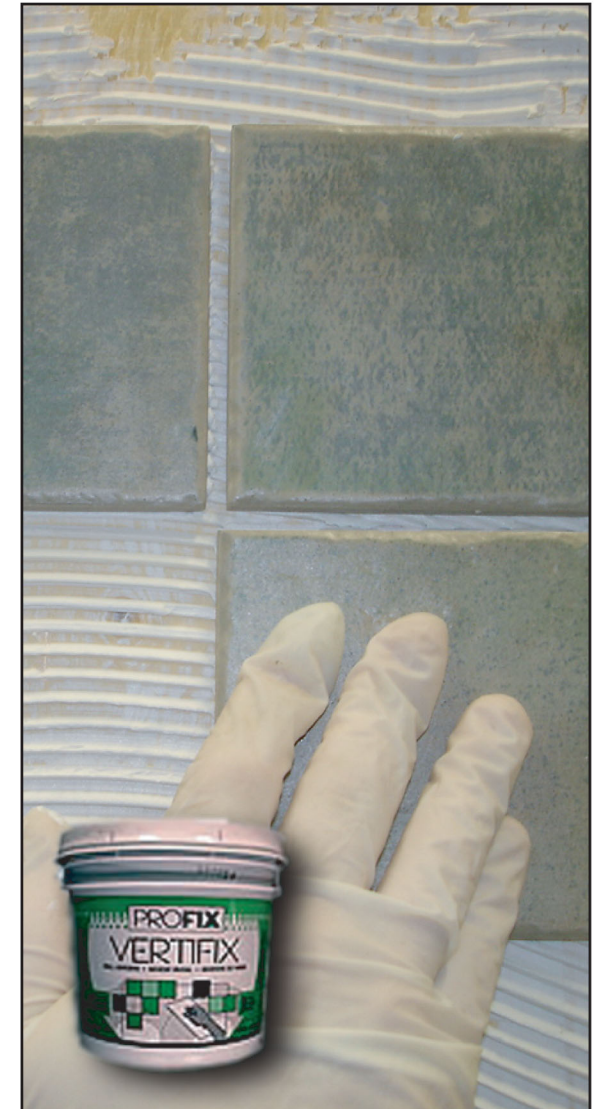

## PROFIX COMMITMENT



La Margna Inc., as the exclusive manufacturer of PROFIX tile and stone installation products and PROTHERM radiant floor systems, is committed to offering you superior quality products that meet or surpass industry standards which are established by the "Terrazzo, Tile & Marble Association of Canada" (TTMAC) and by the "Tile Council of North America" (TCA).

Using strict quality control standards in our production, we ensure that you get the very best products for the best results possible. Furthermore, thanks to our research & development laboratory and a qualified research team, La Margna inc. is constantly refining its technology to offer the best performance at the best price.

All PROFIX products are guaranteed to offer optimum performance when they are used during installations that conform to the standards established by the TTMAC, TCA and La Margna.

La Margna inc. stands by its products and offers excellent technical support for your projects, with complete products specifications and installation techniques. No matter the size of your project, whether you are an architect, store owner or contractor, the PROFIX team is available for you. So don't hesitate to contact our PROFIX technical support service. Trust PROFIX products for excellent long lasting results.

We thank you for choosing PROFIX quality products for your next project.

## HOW TO APPLY CERAMIC TILE ADHESIVE?



### Step 1

No mixing required – The adhesive is ready to use. The paste is cream white and creamy.



### Step 2

Apply sufficient adhesive with a "V" trowel to provide 85% contact with the back of the tile. Do not spread more adhesive than can be covered before the adhesive starts to skin. If skinning occurs, scrape off and apply fresh adhesive.

Installing your tiles over an adhesive that has started to skin will lead to adhesion problems.



### Step 3

Press tiles into their place with a slight twisting motion, immediately adjust for correct alignment and joint spacing.



### Step 4

If necessary, clean adhesive from face of tile while still wet with a damp cloth. Promptly clean tools with water while material is fresh.



### Step 5

Let cure at least 24 hours (Walls/absorbent tiles) to 72 hours (floors – non-absorbent tiles) before grouting. For grouting, use POLY 600 unsanded grout (for joints less than 1/8"); POLY 500 sanded grout for (joints 1/8" - 1/2") or Poly 700 100% epoxy, Stain Resistant Grout.

## A FEW THINGS WE NEED TO REMEMBER ABOUT ADHESIVES

- Not recommended for vertical use with large tiles (up to 8" X 8").
- The paste is already mixed and ready to use.
- Not recommended for high moisture areas.
- Not recommended for a tile on tile installation.

