

# FLEX XL

## ECONOMIC MORTAR



**FLEX XL RENCONTRE OU DÉPASSE LES NORMES DE L'INDUSTRIE\*:**

- CGSB**  
 - CGSB 71-GP-30M, Type 2
- ANSI**  
 - ANSI A118.4.  
 - ANSI A118.11  
 \* Voir le lexique à la fin.

### DESCRIPTION

FLEX XL is a dry, one-component, polymer-modified, thin-set mortar designed for the installation of ceramic, porcelain, slate, marble, granite or natural stones on floors and walls. This mortar is recommended for most interior residential uses.

### CHARACTERISTICS

- Economical
- Polymer fortified
- Easy to mix (add water only)
- Easy to apply


### FORMAT

- 27.22 kg (60 lbs) bag – 49 per skid

### TECHNICAL DATA AT 22°C

Pot life	2 hours
Open time	30 minutes
Initial set	24 hours
Final set	28 days
Shear strength:	
- Tile over plywood	190 psi (28 days)
- Tile over tile (porcelain)	280 psi (28 days)
VOC level	0 g/L
Colour	Grey

### SHEAR STRENGTH COMPARATIVE CHART

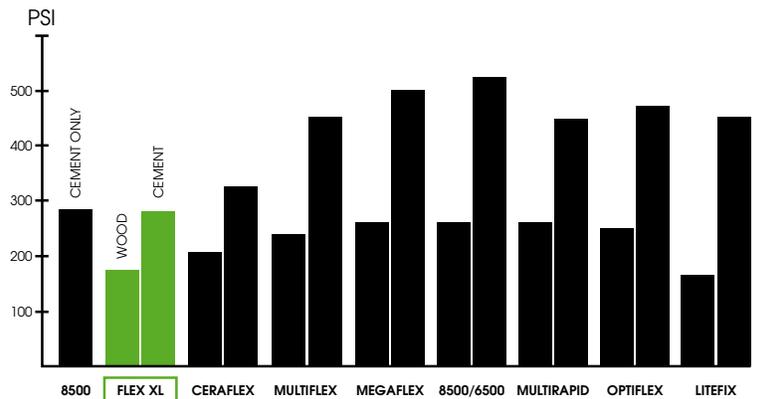


Which size of notched trowel should I use for my tile or stone installation? Interior applications of tile should achieve a minimum coverage of 80% and exterior applications a minimum of 95%. Back buttering the tile and stone will help achieve a greater percentage of coverage.


A 27.22 KG BAG COVERS:

### COVERAGE\*


1/4 X 1/4 - For tiles up to 4" X 4" (100 mm X 100 mm)

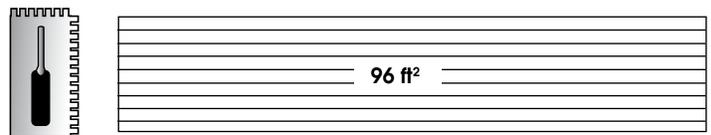

1/4 X 3/8 - For tiles up to 16" X 16" (400 mm X 400 mm)

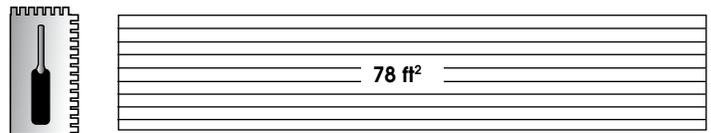

1/2 X 1/2 - For tiles greater than 16" X 16" (400 mm X 400 mm)

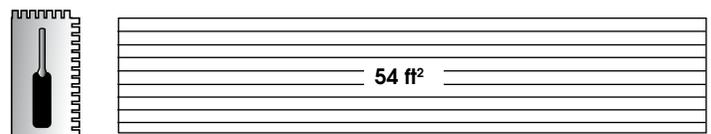

\* Usage requirements are approximate. Coverage will depend on the trowel used and the condition of the subfloor.

### SHELF LIFE

12 months following production date. Must be stored in a dry and heated area.

## RECOMMENDED SUBSTRATES

Test on a small surface first to ensure suitability of coverings.

- Cured concrete (28 days)
- Masonry blocks
- Existing bricks
- Gypsum wallboard (primed only with latex)
- Cement backer-board
- Exterior grade plywood (interior dry areas only)

## TECHNICAL NOTES

- Avoid any circulation for 24 hours.
- Expansion joints : do not cover the joints with mortar.
- Use white mortar when installing white marble or light coloured stones. Some natural stones require specific methods of installation. Verify with your retailer.
- Do not use in submerged areas (pools, hot tubs or fountains).

## INSTRUCTIONS

### UNDERLAYMENT

The underlayment is the most important step for a long lasting result. Refer to the "Good supports" technical bulletin on our website. The underlayment must meet the TTMAC and TCA standards.

### SUBSTRATE PREPARATION



All backing surfaces must be structurally sound, dry and free of any deleterious substances (wax, sealer, etc.), which may act as bond barriers (according to industry standards as outlined by the TTMAC and the TCA).

### MIX



In a clean container, add FLEX XL to water. Mix slowly to obtain a homogeneous and smooth consistency. Let sit for 10 minutes and remix. If using a mixer, use a low speed one to ensure that no air is trapped in the mix. Do not add more water or powder. Some hardening may occur before all material is used. If so, simply remix by hand; do not add any liquid.

**Ratio: Approximately 5.9 L of water per 27.22 kg of powder**  
(powder/water : 3 for 1)

### APPLICATION




Use recommended notched trowel with enough depth (1/4" x 3/8") to ensure sufficient contact between the mortar and the back of the tile. Backbuttering is recommended by the TTMAC for tiles larger than or equal to 12" x 12". Using the flat edge of the trowel, apply a thin coat of mortar and, using the notched side, immediately add another thin coat of mortar. Do not use more

mortar than can be spread in 20 minutes. All trowels should be square-notched and not "V" or rounded type. Place tiles firmly into position in a slight twisting motion before skinning occurs. Immediately align and adjust tile after installation. Leave 2/3 of the joint height free of mortar for grouting. Déposer le carreau avec une ferme pression tout en effectuant un mouvement de torsion pour assurer un contact parfait du carreau avec le ciment-colle avant qu'un film apparaisse sur le mortier. Battre

en place les carreaux immédiatement après leur installation. Faire tout ajustement immédiatement. Laisser libre de mortier 2/3 de la hauteur du joint afin que le coulis ait suffisamment d'espace pour bien se solidifier.

### CLEANING




Promptly clean tools with water while material is fresh.

### CURING



Let cure at least 24 hours before grouting at 22°C. Be advised that the lower the temperature and the higher the humidity, the longer the drying time will be. Never try to accelerate drying time. Light circulation is allowed after 24 hours, but only for grouting. A minimum of 48 hours is necessary before replacing furniture and supplies. Heavy circulation is allowed after 7 days. After 28 days, the cure will be complete.

### MAINTENANCE



No particular maintenance is required given the nature of this product. For grouting, use POLY 600 unsanded grout, POLY 500 sanded grout, or POLY 800 PRECISION epoxy stain resistant grout.

## LIMITATIONS

- For indoor applications only.
- The temperature should be maintained minimally at 10°C for 28 days to allow the cement to reach its final and complete cure, and therefore, all its strength.
- Do not use over pressed wood, particle board, masonite, lauan or asbestos board, or other similar materials. Do not use on hardwood floors.

## WARRANTY

The product is guaranteed for a period of 3 years for an indoor installation. See «Warranty» on the website for more details.

## LEED



Leadership in Energy & Environmental Design (LEED) is a green building rating system that plans, develops, compares and certifies sustainable buildings around the planet. The Canada Green Building Council certifies the project in terms of total points obtained after verifications and an examination of the documentation submitted by the design and construction teams. Ceraflex can help to achieve the following credits.

### INDOOR ENVIRONMENTAL QUALITY:

IEQ Credit 3.2 option 3 - Reduce indoor air quality problems

IEQ Credit 4.1 - Low Emitting Materials

IEQ Credit 4.3 - Low Emitting Materials - Flooring systems

### MATERIALS AND RESOURCES:

MR Credit 5.1 - 10% extracted and manufactured regionally

MR Credit 5.2 - 20% extracted and manufactured regionally

MR Credit 4.1 - 7.5% of recycled content

MR Credit 4.2 - 15% of recycled content

Refer to the PROFIX website for letters of certification.

## CAUTION



This product contains cement and silica that can irritate skin and eyes. Avoid prolonged contact with skin. In case of contact with eyes, rinse thoroughly with water.

## HEALTH AND SAFETY

Refer to the MSDS on our website for handling recommendations.

## TECHNICAL SUPPORT

For questions, please contact our customer service PROFIX toll free:  
1-800-463-6850 or [info@profixsystems.com](mailto:info@profixsystems.com).

PROFIX is a registered trademark.

LA MARGNA inc.

412, Saint-Sacrement, Quebec (Quebec) G1N 3Y3 CANADA

**T** (418) 688-8286

**F** (418) 688-2070

[www.profixsystems.com](http://www.profixsystems.com)

## LEXICON

### POT LIFE

Maximum time the product can stay in the pail and remain usable. After this time, the product will be difficult to use and start to dry, making your work more difficult and the product much less effective.

### OPEN TIME

Maximum time you have to install your tiles once the mortar has been applied to the subfloor. After this time, a film will appear over the surface of the mortar and progressively reduce its grip. It is therefore recommended NOT to install tiles on mortar that has been applied for longer than the maximum time indicated.

### INITIAL SET

Minimum time recommended before allowing light circulation (e.g. the weight of one person) over the surface. Before that time, no circulation should be allowed.

### FINAL SET

Product's final set time.

### SHEAR STRENGTH

Mortar strength in psi.

### DRAFT ISO 13007 (TO COME)

ISO 13007 is essentially a combination of European, British and American ceramic tile adhesive Standards.

### ADHESIVE TYPE SYMBOLS

**C** Means it is a cementitious adhesive containing cement, aggregates and organic additives. The adhesive needs to be mixed with water or a liquid admix just before use.

**D** Means it is a dispersion adhesive. Dispersion means it is a pre-mixed, ready to use adhesive made from water based polymer with organic additives and mineral fillers.

**R** Means it is a reaction resin adhesive containing synthetic resin, mineral fillers and organic additives. The adhesive cures by chemical reaction.

### ADHESIVE PERFORMANCE SYMBOLS

**1** Means the adhesive has passed the minimum pass level tests that are mandatory for that adhesive type.

**2** Means the adhesive has passed the same tests as in 1 and/or other applicable tests, but a higher pass levels.

**F** Means the adhesive has met the requirements for a fast setting adhesive.

**T** Means the adhesive has met the requirements for a slip resistant adhesive

**E** Means the adhesive has met the requirements for extended open time.

### ANSI

Latex-Portland Cement Mortar (ANSI A118.4-1999): A single component mix incorporating a redispersible dry latex in a bag, generally referred to as «Polymer Modified Mortar», generally recommended for moderate, light and residential use. Some high-latex content polymer modified mortars may be suitable for heavier use.

Exterior Grade Plywood (EGP) Latex-Portland Cement Mortar (ANSI A118.11-2000): A modified Portland cement dry-set mortar to which a polymer has been incorporated in latex form or in a powder form for the bonding of tile to exterior grade plywood in interior dry or limited water exposure areas only. When added in latex form it is added as a replacement for part or all of the gauging water in accordance with the manufacturer's instructions.

### CGSB

Meets or exceeds standard norm ONGC 71-GP-30 M type 2 of "Canadian General Standards Board".

### LIABILITY

Before using, the user shall determine the suitability of this product for its intended use and the user alone shall assume all risks and liabilities in connection therewith. La Margna Inc. shall not accept any liability for any damage, loss or prejudice resulting from the direct or indirect use of our product in non-compliance to our specifications. • April 1, 2012